



INTERNATIONAL ORIENTEERING FEDERATION

ISOM 2017

International Specification for Orienteering Maps



INTERNATIONAL ORIENTEERING FEDERATION

This International Specification for Orienteering Maps (ISOM2017) has been compiled and edited by the IOF Map Commission (March/2017).



This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International Public License. For additional license information <https://creativecommons.org/licenses/by-nc/4.0/>
For the full license text <https://creativecommons.org/licenses/by-nc/4.0/legalcode.txt>

ISBN: 978-91-639-3394-3

INTERNATIONAL ORIENTEERING FEDERATION

Drottninggatan 47 3½ tr, SE-65225 KARLSTAD, SWEDEN

Website: www.orienteering.org

E-mail: iof@orienteering.org

IOF INTERNATIONAL SPECIFICATION FOR ORIENTEERING MAPS

1 INTRODUCTION

It is the aim of the International Specification for Orienteering Maps (ISOM) to provide a map specification which can accommodate the many different types of terrain around the world that are suitable for orienteering. These specifications should be read in conjunction with the rules for International Orienteering Federation (IOF) orienteering events. For IOF events, deviations from the map specifications are permissible only with the sanction of the IOF. Other orienteering disciplines (mountain bike orienteering, trail orienteering and ski orienteering) and formats (sprint) may have separate map specifications, but the ISOM is the basis for the other specifications.

The development of orienteering maps reflects the needs of the sport and the technology available to produce them. In the very early days, at the end of the 19th century, state topographical maps at very small scales (e.g. 1:100 000) were often used. These were gradually produced at larger scales and additional detail was added. Aerial photographs and colour printing improved the accuracy and legibility of maps. This led to the production of special purpose orienteering maps in the 1950s. In the early days of international orienteering, the contents and symbols of orienteering maps varied from place to place. To ensure fair international competitions, standardisation was necessary, and this triggered the creation of the ISOM. The first official version was published in 1969. In ISOM1972, green was introduced to show runnability, and orienteering maps started to look very much like they do today. Fortunately, the ISOM has been very well received, and most national federations have applied the ISOM also for maps used in local events. The ISOM now specifies about one hundred different symbols.

Digital cartography entered the stage in the 1990s. Up to that time, maps had been drawn with pen and ink or scribed onto film. These were then copied to printing plates, one for each colour, from which the maps were printed. Digital cartography has enabled greater precision in drawing, and easier modification of maps. Unfortunately, it has also helped mappers to overload maps with too much detail.

Other technological developments have also influenced orienteering mapping. Photogrammetry and, more recently, airborne laser scanning (or LiDAR - light detection and ranging) has provided better base maps. Global Navigation Satellite Systems (GNSS) can be used to provide precise locations during fieldwork. Printing technology is evolving and digital four-colour printing has provided new challenges for orienteering map printing. New types of paper (including waterproof paper) affect the printing process.

The previous ISOM version was published in 2000. Since then some technological developments have occurred as well as some changes in the event programme. These developments have been taken into consideration when revising the ISOM. However, the basic requirements have not changed. Map legibility is still the most important aspect of an orienteering map. In the process of producing a readable map, generalisation is the keyword. This means that the mapper must always deal with selection, simplification, displacement and exaggeration.

Skilful generalisation is necessary to ensure that maps are readable and suitable for orienteering competitions. The mapper must always consider that the orienteering map is read whilst running fast through the terrain, and that the perceptive capabilities of the human eye and brain have their limits.

1.1 Conventions

Several words are used to signify the requirements in this specification.

- *Must/ Shall/ Required* mean that the definition is an absolute requirement.
- *Must not/ Shall not/ May not* mean that the definition is an absolute prohibition.
- *Should / Recommended* mean that there may exist valid reasons in particular circumstances to ignore a particular item, but the full implications must be understood and carefully weighed before choosing a different course.
- *Should not / Not recommended* mean that there may exist valid reasons in particular circumstances when the particular behaviour is acceptable or even useful, but the full implications should be understood and the case carefully weighed before implementing any behaviour/action described with this label.
- *May / Optional* mean that an item is truly optional.

2 GENERAL REQUIREMENTS

2.1 Orienteering and the map

Orienteering is a sport in which the competitor (orienteer) completes a course of legs between control points in the shortest possible time, by navigating aided only by map and compass. As in all forms of sport, it is necessary to ensure that the conditions of competition are the same for all competitors.

From the competitors' point of view, a legible and accurate map is necessary for a qualified choice of route, and it enables them to navigate along the route chosen to suit their navigational skills and physical abilities. However, skill in route choice and map reading loses all meaning if the map is not a good representation of the ground - if it is of poor legibility, inaccurate or out-of-date. In the ideal case no competitor should gain an advantage or suffer a disadvantage because of faults on the map. For an international event the map must be up-to-date in all parts which could affect the result of the competition.

The steepness, elevation and shape of the landforms are essential information and are shown using contours. Identifying anything which impedes progress is crucial to the orienteer: e.g. cliffs, water, dense vegetation. The path and track network shows where the going and navigation is easiest. A detailed classification of the impediments to running and the ease of going helps the competitor to make the right decisions.

The aim of the course planner is a course where the deciding factor in the results will be navigational skill. This can be achieved only if the map is clear and legible under competition conditions and sufficiently accurate, complete and reliable. Controls are important building blocks of a course. Choice of sites, placing of the markers, checking their positions, and locating controls in competition, all put definite demands on the map. The better the map the course planners have, the greater chance they have of setting good, fair courses, whether for the elite orienteer or for the novice.

For the mapper, the task is knowing which features to map and how to represent them. A continuing involvement in the sport is important for a basic understanding of the requirements for the orienteering map: its content, the need for accuracy, the level of detail, and above all, the need for legibility.

2.2 Content

An orienteering map is a topographical map. It shall serve navigation through the terrain by representing a selection of prominent features, and it shall serve route choice by showing variations in runnability (impact on speed) and visibility. The map shall contain sufficient information for the competing orienteer, while at the same time being legible at running speed and under varying weather and light conditions. This is accomplished by using a carefully designed set of symbols and colours and by emphasising generalisation.

Consistent use of colour is important to ease map reading: Blue is used for features that relate to water; Yellow is used for open areas; Green is used for vegetation features; Brown is used for landforms; Black and Grey are used for everything else, including rock and cliffs, paths and roads, and most man-made objects; Purple is used for course information.

The map shall only contain features which are obvious on the ground to a competitor at speed. It should show things which could influence map reading or route choice: landforms, rock features, ground surface, hindrance to progress through the vegetation (runnability), main land usage, hydrography, settlements and individual buildings, the path and track network, other lines of communication and features useful from the point of view of navigation. However, the most important thing is to maintain the clarity and legibility of the map through skilful generalisation.

The shape of the ground is the most important aspect of an orienteering map. The correct use of contours (including index contours) to show a three dimensional picture of the ground shape and height difference cannot be overemphasised.

An orienteer's speed and choice of route through the terrain is affected by many factors. Information on all of these factors must therefore be included on the map by classifying paths and tracks, by indicating whether marshes, water features, rock faces and vegetation are passable, by showing the characteristics of the ground surface and the presence of dense vegetation and open areas.

Clear boundaries between different types of ground surface and different types of vegetation provide valuable reference points for the map reader. It is important that the map shows these.

The map must contain magnetic north lines that shall be parallel to the sides of the map. It may additionally contain some place names and peripheral text to help the competitor orientate the map to north. Such text shall be orientated to north. Text within the map shall be placed to avoid obscuring important features and the style of lettering should be simple. Arrowheads may be used to show magnetic north.

2.3 Runnability

The runnability depends on the nature of the terrain (density of trees/scrub and undergrowth, i.e. bracken, brambles, nettles, as well as marshes, stony ground, etc.). Runnability is divided into five categories of speed. If speed through flat and open runnable forest is 4 min/km, the following applies:

No	Percentage	Description	Examples	Approx. speed min/km
1	> 100%	Easy running	Lawns, paved areas, paths	< 4
2	80-100%	Normal running speed	Rough open land, forest	< 5
3	60-80%	Slow running	Stony ground, undergrowth, dense vegetation	5-6:40
4	20-60%	Walk / Difficult to run	Very stony ground, undergrowth, dense vegetation	6:40-20
5	< 20%	Fight	Extremely stony ground, very dense vegetation	> 20

A combination of a green screen and stony ground means that the runnability will be worse than for each of them in isolation. The steepness of the terrain may also influence runnability (the steeper the terrain, the less runnable).

2.4 Barriers

In orienteering terrain, there may be features that are effectively impassable or uncrossable. Examples are buildings, fences, walls, high cliffs, water bodies, uncrossable marshes and very dense vegetation. There may also be features that are out-of-bounds to the competitor, that is, they shall not be crossed or entered. Examples are environmentally sensitive areas and private land.

Such features are very important for route choice and may also present a danger to the competitor. They must be clearly identifiable on the map by using very visible symbols as indicated in this specification.

In an ideal world, all features mapped using barrier symbols would be impossible to pass / cross. But nature is complex, conditions vary over time, maps have to be generalised, and the competitors do not have equal physical abilities. This means that a feature that is mapped using a barrier symbol could turn out to be passable / crossable, but to what extent it is possible to pass / cross cannot be determined by inspecting the map.

That a feature is not mapped as impassable does not mean that it will be passable by all orienteers. It should, however, be passable by the average elite orienteer under normal conditions.

2.5 Map reading

The mapper must always take into consideration the special conditions for orienteering map reading. Firstly, running makes reading a map more difficult. Secondly, orienteering often takes place in forests, and in all kinds of weather. The light in forests with dense canopies is dimmed even in the middle of the day, and there are numerous other factors that impact map reading, such as rain, dirt and damages to the map or plastic bag caused by rough handling. Therefore, it is obvious that legibility is of utmost importance for orienteering maps. Minimum graphical dimensions must be respected and unnecessary detail must be avoided.

2.6 Generalisation and legibility

Good orienteering terrain contains a large number and a great variety of features. Those which are most essential for the competitor must be selected and presented on the orienteering map. To achieve this, in such a way that the map is legible and easy to interpret, generalisation must be employed. There are two phases of generalisation: selective generalisation and graphical generalisation.

Selective generalisation is the decision as to which detail and features should be presented on the map. Two important considerations contribute to this decision: the importance of the feature from the competitor's point of view, and its influence on the legibility of the map. These two considerations will sometimes be incompatible, but the demand for legibility must never be relaxed in order to present an excess of details and features on the map. Therefore, it will be necessary at the survey stage to adopt minimum sizes for many types of detail. These minimum sizes may vary somewhat from one map to another according to the amount of detail in question. However, consistency is one of the most important qualities of the orienteering map.

Graphical generalisation can greatly affect the clarity of the map. Simplification, displacement and exaggeration are used to this end.

Legibility requires that the size of symbols, line thicknesses and spacing between lines be based on the perception of normal sight in daylight. In devising symbols, all factors except the distance between neighbouring

symbols have been considered.

The size of the smallest feature which will appear on the map depends partly on the graphical qualities of the symbol (shape, format and colour) and partly on the position of neighbouring symbols. With immediately neighbouring features which take up more space on the map than on the ground, it is essential that the correct relationships between these and other nearby features are also maintained.

For orienteering maps, the shape of the terrain is the most important thing to communicate. Dangerous features, such as high cliffs, must be easy to see on the map. Anything that is out-of-bounds or may bar or impede progress is essential information: long cliffs, water, dense thickets, private property. The road, path and track network is important, since it shows where the going and navigation is easiest. Most point features are of less importance than line and area features.

2.7 Accuracy

The general rule should be that competitors shall not perceive any inaccuracy in the map. The accuracy of the map as a whole depends upon the accuracy of measurement (position, height and shape) and the accuracy of drawing. A feature must be positioned with sufficient accuracy to ensure that a competitor using compass and pacing will perceive no discrepancy between map and ground.

Absolute height accuracy is of little significance on an orienteering map. On the other hand, it is important that the map shows as correctly as possible the relative height difference between neighbouring features.

Accurate representation of shape is of great importance for the orienteer, because a correct, detailed and sometimes exaggerated picture of the landform is an essential precondition for map reading. However, the inclusion of a lot of details must not disguise the overall shapes. This means that form line usage must be limited to an absolute minimum (e.g. form lines with a shape that can be deduced from the neighbouring contours shall not appear on the map) and insignificant contour detail must be removed.

Drawing accuracy is of primary importance to any map user because it is closely connected with the reliability of the final map.

Absolute accuracy is important if an orienteering map is to be used with positioning systems or together with geographical datasets from other sources. In such cases it must also be possible to transform the map to a well-known geographical reference system. Readability is always more important than absolute accuracy. Displacement of map features is encouraged if it makes the map more readable.

2.8 Georeferencing

To georeference a map means to locate it using a geographical reference system. Georeferencing is useful when geographical data from different sources (e.g. orienteering map, digital elevation model, aerial photos, GNSS positions) need to be combined, and it is useful when tracking competitors during a race. It is therefore strongly recommended to produce georeferenced orienteering maps. However, before printing the map, it shall first be rotated to make the magnetic north lines parallel to the edges of the map page.

2.9 Map scale

The base scale for an orienteering map is 1:15 000.

Generalisation shall follow the requirements for the scale 1:15 000.

2.9.1 Map enlargements

The IOF competition rules regulate the use of map enlargements for IOF events. When a map is enlarged, all lines, symbols and screens shall be enlarged proportionally (for the map scale 1:10 000 this means to 150%). This also applies to the overprint symbols.

For older age groups where reading fine lines and small symbols may cause problems due to deteriorating vision, enlarged maps are recommended for all formats. Enlargement to the scale 1:10 000 is always recommended for the youngest age groups where the capacity of reading complex maps is not fully developed.

Large maps are difficult to handle. Maps larger than A3 should be avoided. A map should not be larger than is necessary for the orienteering competition. Large maps should be cut to fit the course (however, they should not be smaller than A5). Information about scale, contour interval and north direction shall be available also on cut maps.

2.10 Contour interval

The ability to easily assess the steepness of the terrain is vital in orienteering. It is therefore very important that the contour interval for orienteering maps is standardised.

The contour interval for orienteering maps is 5 metres. In flat terrain where the slope is less than 5% (or the contours would be more than 7 mm apart) all over the area, 2.5 metre contours may be used. Different contour intervals shall not be used on the same map.

The presence of a form line between contours makes the terrain appear nearly twice as steep. It is therefore very important that form lines are used sparingly. Form lines shall only be used to represent important landforms that cannot be shown using contours. Instead of using form lines, contours should be shifted slightly up or down to better represent the important landforms.

2.11 Minimum dimensions

For line and area symbols certain minimum dimensions must be observed. These are based on both printing technology and the need for legibility. Dimensions in this specification are given at the printed scale of 1:15 000.

2.11.1 On the ground (real world) minimum dimensions


Features that are represented on an orienteering map shall be prominent and easily identifiable by the orienteer whilst running. Minimum on the ground dimensions are provided for many of the symbols in this specification and these must be respected. Minimum dimensions do not mean that all features larger than that need to be represented on the map. For complex terrain, it will often be necessary to operate with larger minimum dimensions to achieve a legible map.

Prominent features with small terrain footprints are exaggerated on the map (for instance by using a point symbol) to make them identifiable. When a feature is exaggerated on the map, neighbouring features may need to be displaced to ensure readability and correct relative positions.

2.11.2 Footprint of symbols

There has to be minimum dimensions for line and area symbols on a map. These are termed graphical minimum dimensions. The footprint of a symbol is the area the symbol would cover if it was projected onto the terrain.

For a line symbol, the graphical minimum dimension concerns its length on the map. If a line is too short on the map, it ceases to look like a line, and can be mistaken for a point symbol. Also, styled line symbols must not be made so short that the symbol becomes unrecognisable. If there is room on the map and the line feature is prominent and significant, it could be mapped even if it is shorter than the footprint of the minimum size line. However, it must always be exaggerated in size on the map to meet the graphical minimum length. A bent line may have to be drawn longer than the minimum length in order to make it recognisable.



For an area symbol, the graphical minimum dimension concerns the area covered by the symbol on the map. If the area is too small, it will be difficult to differentiate it from point symbols, it becomes 'noise' to the map user or the structure of the symbol will become unrecognisable. If the area is too narrow, it will be difficult to differentiate it from line symbols, and a structured area symbol will become unrecognisable. If there is room on the map and the area feature is prominent and significant it can be mapped even if it is smaller than the footprint of the minimum size area or narrower than the footprint of the minimum width. However, it must always be exaggerated to meet the minimum graphical dimensions.

2.11.3 Graphical minimum dimensions


The graphical minimum dimensions apply to the base scale of 1:15 000. This means that for enlarged maps, the graphical minimum dimensions will be proportionally larger (1.5 times larger for the 1:10 000 map scale). For instance for a cliff (symbol 202), the minimum length on the map is 0.6 mm. This means that for the map scale 1:10 000, the minimum length on the map for a cliff is 0.9 mm.

Where graphical minimum dimensions are given for individual symbols, these take precedence. For other symbols the following graphical minimum dimensions apply.

Minimum gaps

To be able to identify the individual symbols, minimum gaps are important. In general, the minimum gap of 0.15 mm applies. The minimum gap between two symbols is the minimum distance between the outlines of the symbols. Listing all symbol combinations is not practical, but the following strong recommendations should be combined with common sense.

For point symbols, the general gap of 0.15 mm applies.



The minimum gap between point symbols and line symbols including outlines of area symbols should be 0.15 mm, with exceptions for gaps between contours and point symbols of other colours.




The minimum gap between line symbols including outlines of area symbols of the same colour is 0.15 mm, with some exceptions:



- Joins and crossings of network symbols (earth walls, watercourses, roads, tracks and paths, power lines, walls and fences).

- Crossings, such as contours and symbols 105-107 (*earth walls and erosion gully*); symbol 513 (*wall*) and symbol 505 (*footpath*); symbol 511 (*major power line*) and symbol 516 (*fence*).
- Contours and symbol 104 (*earth bank*).

For legibility reasons, overlapping between line symbols (including outlines of area symbols) of different colours should be avoided, and the minimum gap of 0.15 mm should be applied. There are however exceptions:



- Contours and cliffs should at least partly overlap
- Crossings, such as water courses and contours; fences and water courses.


The minimum gap of 0.15 mm only applies to the following types of area symbols:

- Area symbols with outlines, such as symbols 301 (*uncrossable body of water*), 302 (*shallow body of water*), 307 (*uncrossable marsh*), 501 (*paved area*), 520 (*out-of-bounds area*), 522 (*canopy*) and 523 (*ruin*).
- Exclusive area symbols, such as symbol 206 (*gigantic boulder*), and 521 (*building*).

For area symbols in brown, black and blue with structure, such as broken ground, boulder field, stony ground and marsh symbols, it is important that the elements of the symbols do not interfere significantly with point and line symbols.




Passages between symbols representing impassable / uncrossable features must be clearly recognizable, so the minimum gap should be 0.4 mm. Examples are symbols 521 (*building*) and 520 (*out-of-bounds area*); symbols 521 (*building*) and 515 (*impassable wall*); symbols 521 (*building*) and 521 (*building*); symbols 201 (*impassable cliff*) and 201 (*impassable cliff*); symbols 411 (*vegetation, impassable*) and 301 (*impassable body of water*).



Openings in line symbols that represent impassable features (fence, cliff, wall) must be clearly recognizable and need to be at least 0.4 mm wide. For other line features, a minimum opening of 0.25 mm applies.

Minimum line length

Line symbols need to be long enough to differentiate them from other symbols. Closed lines must have sufficient white space within to allow the line symbol to be recognized. For closed styled lines such as fences, walls and cliffs, there must be enough room for the styling (e.g. tags), so that the type of symbol can be recognized.



Rendering of dashed lines, dotted lines and styled lines

Dashed lines:

The dash length at the start and end of a dashed line should be the same. The gaps shall always be as given in the symbol specification. The dashes shall always be as close to the dash length given in the symbol specification as possible, and never shorter than 0.8 times the given length.

Dotted lines:

The gap between the dots at the start and end of a dotted line should be the same. The gaps shall always be as close to the gap given in the symbol specification as possible, and never shorter than 0.8 times the given length.

Styled lines:

The end length at the start and end of the line should be the same. The distance between style symbols on a styled line shall always be as close to the distance given in the symbol specification as possible, and never shorter than 0.8 times the given length. The end length shall be half the distance between the symbols.

Styled dashed lines:

Dash length shall follow the rules for dashed lines, and the style symbol shall always be centered on the dash.

Minimum dimensions for areas

Providing minimum dimensions for areas is difficult as the shape varies. The minimum width is as important as the minimum area. Very thin parts of areas must be exaggerated. Minimum widths for area symbols (if not specified for the symbol):

100% green: 0.25 mm (footprint 3.75 m).

100% yellow: 0.3 mm (footprint 4.5 m).

Colour screens: 0.4 mm (footprint 6 m).



2.11.4 Screens

Vegetation, open areas, marshes, etc. are shown with dot or line screens. The following table lists the permissible combinations of screens.

113 Broken ground										113 Broken ground
114 Very broken ground										114 Very broken ground
208 Boulder field	●	●								208 Boulder field
209 Dense boulder field										209 Dense boulder field
210-212 Stony ground	●	●								210-212 Stony ground
307 Uncrossable marsh										307 Uncrossable marsh
308, 310 Marshes	●	●	●	●						308, 310 Marshes
401-402 Open lands	●	●						●		401-402 Open lands
403-404 Rough open lands	●	●	●	●	●	●	●			403-404 Rough open lands
405 Forest	●	●	●	●	●	●	●			405 Forest
406, 408, 410, 411 Vegetation	●	●	●	●	●		●			406, 408, 410, 411 Vegetation
407, 409 Vegetation, good visibility	●	●	●	●	●		●	●		407, 409 Vegetation, good visibility

2.12 Printing and colour

An orienteering map must be printed on good, possibly water resistant, paper (weight 80-120 g/m²).

Spot colour printing is recommended for IOF events. Other printing methods may be used, if colours and symbol sharpness have the same quality as printing with spot colours.

Legibility depends on the correct choice of colours.

Until 2000, the majority of orienteering maps were printed using spot colour offset printing. With digital maps many new printing technologies have emerged, like CMYK offset printing (CMYK or 4-colour printing), and printing using laser or inkjet printers.

The new printing techniques have not yet reached the quality of spot colour offset printing. A badly printed map will spoil the time consuming field surveying and map drawing process, and cause unfair conditions for competitors. Consequently, any use of maps printed in another way than the benchmark “spot colour offset printing” for orienteering events must be tested carefully beforehand, and for international events approved by the IOF.

For major IOF events, only spot colour offset printing will be allowed until the IOF decides that the quality of alternative printing methods have reached a sufficient level.

2.12.1 Spot colour printing

Spot colour printing uses pure colour inks. Each spot colour ink is made by mixing a number of stock inks in specific proportions to produce the desired colour. The colours specified for use for orienteering maps are defined by the Pantone Matching System (PMS).

The map may be in up to 6 colours (excluding overprinting).

The following spot colours shall be used for orienteering maps:

Colour	PMS number
Black	Process black
Brown	471
Yellow	136
Blue	299
Green	361
Grey	428
Violet	Purple

The appearance of colours is dependent on the printing order.

In spot colour printing, order should always be:

1. yellow
2. green
3. grey
4. brown
5. blue
6. black
7. purple

2.12.2 Four-colour printing

Four-colour printing is the traditional way of printing most colour work; maps have been one of the main exceptions due to the fine line requirements.

The four-colour printing method uses the three basic colours of the additive colour model: cyan, magenta and yellow. In theory a mix of 100% of cyan, magenta and yellow produces black colour, but in reality it will be more of a dark brown. Therefore, black is normally printed as a separate colour. After these four colours the model is often referred to as CMYK.

Although four-colour printing requires fewer and standardized inks, the main advantage of using this process is that it allows the inclusion of colour photographs and full colour advertisements at no extra cost.

The mapper has to take into consideration the limitations and potential errors of this method. The reproduction of very thin lines (contours) requires special attention.

Colours

Colour recommendations for CMYK printing (and other alternative printing methods) is published in a separate document.

Screens


The colour mixture can be done either with traditional printing screens or special printing screens with randomly distributed dots called stochastic screens or frequency modulated screens. The latter screens will improve legibility and make fine lines such as contours more readable, and is therefore highly recommended.

Screen frequency

Traditional screens should have a screen frequency of at least 60 lines/cm. For stochastic screens the frequency will vary randomly.

Angles

To avoid unwanted moiré effects the recommended angle set should always be used when doing CMYK printing with regular rasters. In proper stochastic screens the dots are placed randomly, so angles are irrelevant and unwanted moiré effects will not appear.

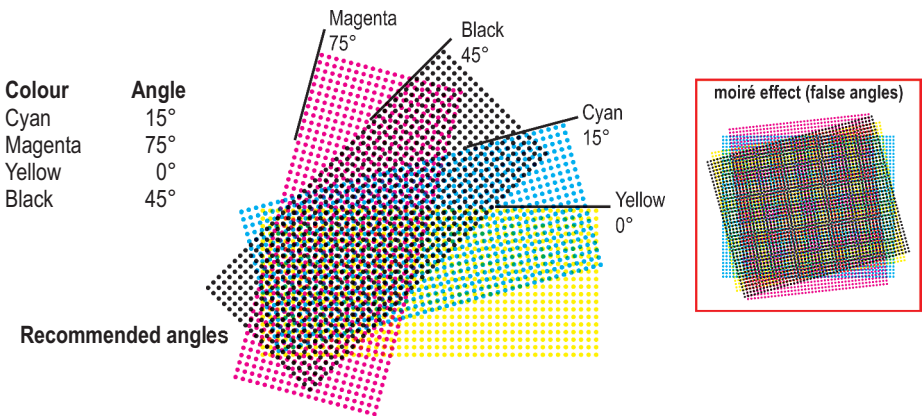

Printing order

The appearance of colours is dependent on the printing order. In 4-colour offset printing of orienteering maps the printing order should be:

1. Black
2. Yellow
3. Cyan
4. Magenta

Overprinting

With traditional spot colour printing inks are physically printed on top of each other. It is possible to simulate the same with four-colour printing technique, and this optimises legibility and gives a colour appearance as close to traditional spot colour printing as possible. To achieve this effect in four-colour printing, information underlying (in the spot colour printing order described in 2.12.1) a specific spot colour should not be blocked out (erased / printed white) completely, but should be blended in to produce a new colour for printing. The use of overprinting effect with 4-colour offset printing is recommended for the following solid colours:

Purple
Black
Brown
Blue
Green



Illustration: Contours in dense vegetation printed in 4-colours. Overprinting effect in the right illustration.

2.12.3 Colour vision impairment

Colour vision impairment is the decreased ability to perceive differences between some colours that others can distinguish. That can affect orienteering map reading. 5-8% men and 0.5% women have some kind of colour related visual disorder. Orienteers with colour impairments may confuse the following colours:

- magenta and green (control in dark green areas - very hard to see)
- yellow and green (hard to distinguish between open and thick forested areas)
- brown and green (problems with brown symbols in green areas)

When choosing colours for the ISOM the above was considered. The chosen set of colours is a compromise.

2.12.4 Printing suggestions for the colour vision impaired

Structure can help in differentiating screens.

Use a rougher dot screen or a hatch pattern for the green screens (406, 408) to differentiate between greens and yellows.

Use a rougher dot screen or a hatch pattern for the green component of the forbidden area (olive green).

2.13 Peripheral information

The following information shall be provided on the front of the map:

- Map scale; Contour interval.

Other information that is often included:

- Name of the map; Map issuer; Date of the map (year of surveying); Map specification; Name of mappers; Name of print shop; Copyright.

3 SYMBOLS

Definitions of features to be mapped and specifications of map symbols are given in the following sections. Symbols are classified into seven categories:

Landforms	(brown)
Rock and boulders	(black+grey)
Water and marsh	(blue)
Vegetation	(green+yellow)
Man-made features	(black)
Technical symbols	(black+blue)
Course symbols	(purple)

Note: dimensions are specified in mm at the scale of 1:15 000.
All drawings are at 1:7 500 for clarity only.

<	gap or infill between two lines
—	line thickness
—	distance
∅	diameter
↑	symbol orientated to north
(OM)	= Outside measure
(IM)	= Inside measure
(CC)	= Centre to centre

Most of the symbols in this specification shall be orientated to north. That a symbol is to be orientated to north is indicated with an arrow pointing upward beside the symbol. When a symbol shall be orientated to north, it means that it shall be orientated to magnetic north and hence relative to the edges of the paper and the magnetic north lines.

For area symbols, colour percentages are given in the text ("green 50%") and the illustrations ("50%"). For area symbols with structure / pattern, the calculated colour percentages are given in parenthesis.

Detailed graphical definitions for some of the symbols are provided in section 3.8 *Precise definitions of symbols*.


3.1 Landforms

The shape of the terrain is shown by means of contours, aided by special symbols for small knolls, depressions, etc. This is complemented in black by symbols for rock and cliffs.

While it is important to show the smaller features of the terrain, such as re-entrants, spurs, knolls and depressions, it is essential that an abundance of small features do not hide the main features of the terrain, such as hills, valleys and major fault lines.

Excessive use of form lines must be avoided as this complicates the map and gives a wrong impression of height differences.

101 Contour

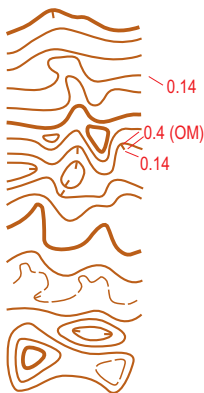

A line joining points of equal height. The standard vertical interval between contours is 5 metres. A contour interval of 2.5 metres may be used for flat terrains.

Slope lines may be drawn on the lower side of a contour line to clarify the direction of slope. When used, they should be placed in re-entrants.


A closed contour represents a knoll or a depression. A depression has to have at least one slope line. Minimum height/depth should be 1 m.

Relationships between adjacent contour lines are important. Adjacent contour lines show form and structure. Small details on contours should be avoided because they tend to hide the main features of the terrain.

Prominent features such as depressions, re-entrants, spurs, earth banks and terraces may have to be exaggerated.

Absolute height accuracy is of little importance, but the relative height difference between neighbouring features should be represented on the map as accurately as possible. It is permissible to alter the height of a contour slightly if this improves the representation of a feature. This deviation should not exceed 25% of the contour interval, and attention must be paid to neighbouring features.

The smallest bend in a contour line is 0.25 mm from centre to centre of the line



(footprint 4 m). The mouth of a re-entrant or a spur must be wider than 0.5 mm from centre to centre of the line (footprint 8 m).

The minimum length of a contour knoll is 0.9 mm (footprint 13.5 m) and the minimum width is 0.6 mm (footprint 9 m) outside measure. Smaller prominent knolls can be represented using symbol 109 (*small knoll*) or symbol 110 (*small elongated knoll*) or they can be exaggerated on the map to satisfy the minimum dimension.

A depression must accommodate a slope line, so the minimum length is 1.1 mm (footprint 16.5 m) and the minimum width is 0.7 mm (footprint 10.5 m) outside measure. Smaller, prominent depressions can be represented using symbol 111 (*small depression*) or they can be exaggerated to satisfy the minimum dimension.

Contours should be adapted (not broken) in order not to touch symbol 109 (*small knoll*) or 110 (*small elongated knoll*).

Colour: brown.

102 Index contour


Every fifth contour shall be drawn with a thicker line. This is an aid to the quick assessment of height difference and the overall shape of the terrain surface.

An index contour may be represented as an ordinary contour line in an area with much detail. Small contour knolls and depressions are normally not represented using index contours.

The index contour level must be carefully selected in flat terrain. The ideal level for the index contour is the central contour in the most prominent slopes.

An index contour may have a height value assigned. A height value should only be inserted in an index contour in places where other detail is not obscured. It shall be orientated so that the top of the label is on the higher side of the contour. The index value (label) shall be 1.5 mm high and represented in a sans-serif font.

Colour: brown.



103 Form line



Form lines are used where more information must be given about the shape of the ground. Form lines are added only where representation would be incomplete with ordinary contours. They shall not be used as intermediate contours. Only one form line should be used between neighbouring contours. It is very important that a form line fits logically into the contour system, so the start and end of a form line should be parallel to the neighbouring contours. The gaps between the form line dashes must be placed on reasonably straight sections of the form line. Form lines can be used to differentiate flat knolls and depressions from more distinct ones (minimum height/depth should be 1 m).

Excessive use of form lines must be avoided as this disturbs the three-dimensional picture of the ground shape and will complicate map reading.

Minimum length (non-closed): two dashes.


Minimum length of a form line knoll or depression: 1.1 mm (footprint 16.5 m) outside measure.

Colour: brown.



104 Earth bank


An earth bank is an abrupt change in ground level which can be clearly distinguished from its surroundings, e.g. gravel or sand pits, road and railway cuttings or embankments. Minimum height: 1 m. An earth bank may impact runnability. The tags represent the full extent of the earth bank.






For long earth banks it is allowed to use tags shorter than the minimum length at the ends. If two earth banks are close together, tags may be omitted. Impassable earth banks shall be represented using symbol 201 (*impassable cliff*).

Minimum length: 0.6 mm (footprint 9 m).
Colour: brown.




105 Earth wall

Distinct earth wall. Minimum height: 1 m.
Minimum length: 2.0 mm (footprint 30 m).
Colour: brown.




106 Ruined earth wall

A ruined or less distinct earth wall. Minimum height: 0.5 m.
Minimum length: two dashes (3.65 mm - footprint 55 m). If shorter, the symbol must be exaggerated to the minimum length or changed to symbol 105 (*earth wall*).
Colour: brown.




107 Erosion gully

An erosion gully which is too small to be shown using symbol 104 (*earth bank*) is shown by a single line. Minimum depth: 1 m.
Minimum length: 1.6 mm (footprint 24 m).
Contour lines shall not be broken around this symbol.
Colour: brown.



108 Small erosion gully

A small erosion gully, dry ditch or trench. Minimum depth: 0.5 m.
Minimum length (isolated): three dots (1.15 mm – footprint 17 m).
Contour lines should be broken around this symbol.
Colour: brown.




109 Small knoll

An obvious mound or knoll which cannot be drawn to scale with a contour. Minimum height: 1 m.
The symbol shall not touch or overlap contours.
Footprint: 7.5 m x 7.5 m.
Colour: brown.



110 Small elongated knoll

An obvious elongated knoll which cannot be drawn to scale with a contour. Minimum height: 1 m.
The symbol shall not touch or overlap contours.
Footprint: 12 m x 6 m.
Colour: brown.



111 Small depression

A small depression or hollow without steep sides that is too small to be shown by contours. Minimum depth: 1 m. Minimum width: 2 m.
Small depressions with steep sides are represented with symbol 112 (*pit*).
The symbol may not touch or overlap other brown symbols. Location is the centre of gravity of the symbol, and the symbol is orientated to north.
Footprint: 12 m x 6 m.
Colour: brown.

112 Pit


Pits and holes with distinct steep sides which cannot be shown to scale using symbol 104 (*earth bank*). Minimum depth: 1 m. Minimum width: 1 m.

A pit larger than 5 m x 5 m should normally be exaggerated and drawn using symbol 104 (*earth bank*). Pits without steep sides are represented with symbol 111 (*small depression*).

The symbol may not touch or overlap other brown symbols. Location is the centre of gravity of the symbol, and the symbol is orientated to north.

Footprint: 10.5 m x 12 m.

Colour: brown.



113 Broken ground

An area of pits and/or knolls which is too intricate to be shown in detail, or other types of rough and uneven ground that is clearly distinguishable but has little impact on runnability.

The dots should be randomly distributed but not interfere with the representation of important terrain features and objects.

The minimum number of dots is three (footprint 10 m x 10 m).

The maximum centre to centre distance between neighbouring dots is 0.6 mm.


The minimum centre to centre distance between neighbouring dots is 0.5 mm.

Contours should not be cut in broken ground areas.

The dots shall not be arranged to form a single point wide line.

Density: 3–4 dots / mm² (9–13%).

Colour: brown.



114 Very broken ground

An area of pits and/or knolls, which is too intricate to be shown in detail, or other types of rough and uneven ground that is clearly distinguishable and affects runnability.

The dots should be randomly distributed but not interfere with the representation of important terrain features and objects.

The minimum number of dots is three (footprint 7 m x 7 m).

The maximum centre to centre distance between neighbouring dots is 0.38 mm.

The minimum centre to centre distance between neighbouring dots is 0.25 mm.

Contours should not be cut in broken ground areas.

The dots shall not be arranged to form a single point wide line.

Density: 7–9 dots / mm² (22–28%).

Colour: brown.



115 Prominent landform feature


The feature must be very clearly distinguishable from its surroundings.

Location is the centre of gravity of the symbol, which is orientated to north.

The symbol may not touch or overlap other brown symbols.


Footprint: 13.5 m x 11.5 m.

Colour: brown.



3.2 Rock and boulders

Rock is a special category of landform. The inclusion of rock gives useful information about danger and runnability as well as providing features for map reading and control points. Rock is shown in black to distinguish it from other landform features. Care must be taken to make sure that rock features such as cliffs fit with the shape and fall of the ground as shown by contours.



201 Impassable cliff

A cliff, quarry or earth bank that is so high and steep that it is impossible to pass/climb or is dangerous.




For vertical rock faces the tags may be omitted if space is short. Ends of the top line may be rounded or square. For plan shape representation, the minimum width is 0.35 mm. Shorter tags may be used at the ends.



The gap between two impassable cliffs or between impassable cliffs and other impassable feature symbols must exceed 0.3 mm on the map.

When an impassable cliff drops straight into water, making it impossible to pass under the cliff along the water's edge, the bank line is omitted or the tags shall clearly extend over the bank line. An impassable cliff should interplay with the contour lines.

Minimum length: 0.6 mm (footprint 9 m).
Colour: black.



202 Cliff

A passable cliff or quarry. Minimum height: 1 m.

If the direction of fall of the cliff is not apparent from the contours, or to improve legibility, short tags may be drawn in the direction of the downslope.



For non-vertical cliffs, the tags should be drawn to show the full horizontal extent.

Ends of the top line may be rounded or square. A passage between two cliffs must be at least 0.2 mm. A cliff should interplay with the contour lines.

Minimum length: 0.6 mm (footprint 9 m).

Crossing a cliff will normally slow progress.

Colour: black.



0.16

203 Rocky pit or cave

Rocky pits, holes, caves or mineshafts which may constitute a danger to the competitor. Minimum depth: 1 m.

Location is the centre of gravity of the symbol, and the symbol shall be orientated to north, except for caves with a distinct entrance, where the symbol should point into the cave.


Rocky pits larger than 5 m in diameter should be exaggerated and represented using cliff symbols (201, 202).

Footprint: 10.5 m x 12 m.

Colour: black.



204 Boulder




A distinct boulder (should be higher than 1 m), which is immediately identifiable on the ground. Groups of boulders are represented using symbol 207 (*boulder cluster*) or a boulder field symbol (208, 209).

To be able to show the distinction between neighbouring (closer than 30 metres apart) boulders with significant difference in size, it is permitted to enlarge the symbol to 0.5 mm for some of the boulders.

Footprint: 6 m x 6 m (7.5 m x 7.5 m).

Colour: black.

205 Large boulder



A particularly large and distinct boulder. A large boulder should be more than 2 m high.

To be able to show the distinction between neighbouring (closer than 30 metres apart) large boulders with significant difference in size, it is permitted to reduce the size of the symbol to 0.5 mm for some of the boulders.

Footprint: 9 m x 9 m (7.5 m x 7.5 m).

Colour: black.

206 Gigantic boulder




A rock pillar or gigantic boulder that is so high and steep that it is impossible to pass/climb.

The gap between gigantic boulders or between gigantic boulders and other impassable feature symbols must exceed 0.3 mm on the map.

Minimum width: 0.8 mm (footprint 12 m). Minimum width (white inside area): 0.2 mm (footprint 3 m).

Colour: black.

207 Boulder cluster



A distinct group of boulders so closely clustered together that they cannot be marked individually. The boulders in the cluster should be higher than 1 metre.

A boulder cluster must be easily identifiable as a group of boulders.


To be able to show the distinction between neighbouring (maximum 30 metres apart), boulder clusters with significant difference in boulder size, it is permitted to enlarge this symbol by 20% (edge length 0.96 mm) for some of the boulder clusters.

The symbol is orientated to north.

Footprint: 12 m x 10 m.

Colour: black.

208 Boulder field



An area which is covered with so many scattered blocks of stone that they cannot be marked individually, is shown with randomly placed and orientated solid triangles with sides of ratio 8:6:5 (inner angles: 92.9, 48.5, 38.6). A boulder field will generally not impact runnability. If the runnability of the boulder field is reduced, symbol 209 (*dense boulder field*) should be used or the symbol should be combined with a stony ground symbol.

A minimum of two triangles should be used. One triangle may be used if it is combined with other rock symbols (for instance directly below cliff symbols (201, 202), adjacent to boulder symbols (204-206) or combined with stony ground symbols (210-212)).

The maximum centre to centre distance between neighbouring triangles is 1.2 mm. The minimum centre to centre distance between neighbouring triangles is 0.75 mm. Density: 0.8–1 symbol / mm² (12–16%). To be able to show obvious height differences within a boulder field, it is permitted to enlarge some of the triangles to 120%.

Footprint of individual triangle: 12 m x 6 m.

Colour: black.


209 Dense boulder field

An area which is covered with so many blocks of stone that they cannot be marked individually and the runnability is affected, is shown with randomly placed and orientated solid triangles with sides of ratio 8:6:5 (inner angles: 92.9, 48.5, 38.6). A minimum of two triangles must be used.

The maximum centre to centre distance between neighbouring triangles is 0.6 mm. Density: 2–3 symbols / mm² (31%–47%). To be able to show obvious height differences within a boulder field, it is permitted to enlarge some of the triangles to 120%.

Footprint of individual triangle: 12 m x 6 m.

Colour: black.



210 Stony ground, slow running

Stony or rocky ground which reduces runnability to about 60-80% of normal speed.

The dots should be randomly distributed but not interfere with the representation of important terrain features and objects.

The minimum number of dots is three (footprint 10 m x 10 m).



The maximum centre to centre distance between neighbouring dots is 0.6 mm.

The minimum centre to centre distance between neighbouring dots is 0.45 mm.

Density: 3–4 dots / mm² (9–13%).

To avoid confusion with symbol 416 (*distinct vegetation boundary*), the dots should not be arranged to form a line.

Colour: black.



211 Stony ground, walk

Stony or rocky ground which reduces the runnability significantly (to about 20-60% of normal speed).

The dots should be randomly distributed but not interfere with the representation of important terrain features and objects.

The minimum number of dots is three (footprint 8 m x 8 m).

The maximum centre to centre distance between neighbouring dots is 0.4 mm.

The minimum centre to centre distance between neighbouring dots is 0.32 mm.

Density: 6–8 dots / mm² (19–25%).

To avoid confusion with symbol 416 (*distinct vegetation boundary*), the dots should not be arranged to form a line.

Colour: black.



212 Stony ground, fight

Stony or rocky ground which is hardly passable (less than 20% of normal speed).

The dots should be randomly distributed but not interfere with the representation of important terrain features and objects.

The minimum number of dots is three (footprint 7 m x 7 m).

The maximum centre to centre distance between neighbouring dots is 0.32 mm.

The minimum centre to centre distance between neighbouring dots is 0.25 mm.

Density: 10–12 dots / mm² (31–38%).

To avoid confusion with symbol 416 (*distinct vegetation boundary*), the dots should not be arranged to form a line.

Colour: black.




213 Sandy ground

An area of soft sandy ground where runnability is reduced to less than 80% of normal speed.

The symbol is orientated to north.

Minimum area: 1 mm x 1 mm (footprint 15 m x 15 m).

Colour: yellow 50%, black (10%).





25 %


214 Bare rock

A runnable area of rock without earth or vegetation should be shown as bare rock. An area of rock covered with grass, moss or other low vegetation, shall not be shown using the bare rock symbol.

An area of less runnable bare rock should be shown using a stony ground symbol (210-212).

Minimum area: 1 mm x 1 mm (footprint 15 m x 15 m).

Colour: grey or black 25%.



215 Trench

Rocky or artificial trench. Minimum depth should be 1 m.

Minimum length: 2 mm (footprint 30 m).

Shorter trenches may be exaggerated to the minimum graphical dimension. Impassable trenches shall be represented using symbol 201 (*impassable cliff*).


Collapsed and easily crossable trenches should be mapped as erosion gullies.

Colour: black.

3.3 Water and marsh

This group includes both open water and special types of vegetation caused by the presence of water (marsh). The classification is important because it indicates runnability and provides features for map reading and control points. A black line around a water feature indicates that it is uncrossable. The features listed in this section may only contain water in some seasons. Marsh symbols are combined with area symbols for openness (yellow) and runnability (green and yellow).

Minimum width 0.3 (IM)




301 Uncrossable body of water

The black bank line emphasises that the feature is uncrossable.

Dominant areas of water may be shown with 70% colour. Small areas of water and bodies of water that have narrow parts shall always be shown with full colour.


Minimum width: 0.3 mm (inside). Minimum area: 0.5 mm² (inside).
Colour: blue, black.



302 Shallow body of water

A shallow seasonal or periodic body of water may be represented using a dashed outline. Small shallow water bodies may be represented as 100% blue (without an outline). Minimum width: 0.3 mm (inside).

Minimum width (full colour): 0.3 mm. Minimum area: 0.5 mm² (inside).
Colour: blue (outline), blue 50%.



303 Waterhole

A water-filled pit or an area of water which is too small to be shown to scale. Location is the centre of gravity of the symbol, and the symbol is orientated to north.

Footprint: 10.5 m x 12 m.
Colour: blue.



304 Crossable watercourse


Should be at least 2 m wide.

Minimum length (isolated): 1 mm (footprint 15 m).
Colour: blue.



305 Small crossable watercourse


Minimum length (isolated): 1 mm (footprint 15 m)
Colour: blue.



306 Minor/seasonal water channel

A natural or man-made minor water channel which may contain water only intermittently.


Minimum length (isolated): two dashes (2.75 mm – footprint 41 m).
Colour: blue.



307 Uncrossable marsh

A marsh which is uncrossable or dangerous for the competitor. The black outline emphasises that the feature is uncrossable. The black outline is omitted for boundaries between uncrossable marsh and symbol 301 (*uncrossable body of water*). The symbol may be combined with a rough open land symbol (403, 404) to show openness. The symbol is orientated to north.

Minimum width: 0.3 mm (inside). Minimum area: 0.5 mm² (inside).
Colour: blue (50%), black.



308 Marsh

A crossable marsh, usually with a distinct edge.

The symbol shall be combined with other symbols to show runnability and openness.

The symbol is orientated to north.

Minimum area: 0.5 mm x 0.4 mm (footprint 7.5 m x 6 m).

Colour: blue (33%).




309 Narrow marsh

A marsh or trickle of water which is too narrow (less than about 5 m wide) to be shown with the marsh symbol.

Minimum length (isolated): two dots (0.7 mm – footprint 10.5 m).

Colour: blue.




310 Indistinct marsh

An indistinct marsh, seasonal marsh or an area of gradual transition from marsh to firm ground, which is crossable. The edge is generally indistinct and the vegetation similar to that of the surrounding ground.

The symbol shall be combined with other symbols to show runnability and openness. The symbol is orientated to north.

Minimum area: 2.0 mm x 0.7 mm (footprint 30 m x 10.5 m).

Colour: blue (26%).




311 Well, fountain or water tank

A prominent well, fountain, water tank or captive spring.

The symbol is orientated to north.

Footprint: 13.5 m x 13.5 m.

Colour: blue.




312 Spring

A source of water.

Location is the centre of gravity of the symbol, and the symbol is orientated to open downstream.

Footprint: 13.5 m x 7 m.

Colour: blue.



313 Prominent water feature

The symbol is orientated to north.

Footprint: 13.5 m x 13.5 m.

Colour: blue.

3.4 Vegetation

The representation of vegetation is important to the competitor because it affects runnability and visibility and it also provides features for map reading.


COLOUR and RUNNABILITY

The basic principle is as follows:

- **white** represents typical open forest,
- **yellow** represents open areas divided into several categories,
- **green** represents the density of the forest and undergrowth according to its runnability and is divided into several categories

The runnability depends on the nature of the vegetation (density of trees / scrub and undergrowth -bracken, brambles, nettles, etc.), but runnability is also affected by marshes, stony ground, etc. which are shown by separate symbols.

Vegetation runnability is divided into categories according to running speed (see section 2.3).

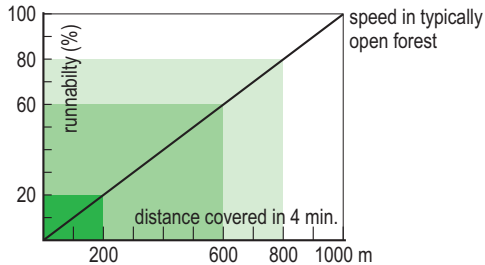

401 Open land




Open land that has a ground cover (grass, moss or similar) which offers better runnability than typical open forest. If yellow coloured areas become dominant, a screen (75% instead of full yellow) may be used.

May not be combined with other area symbols than symbol 113 (*broken ground*), symbol 208 (*boulder field*) and marsh symbols (308, 310).

Minimum area: 0.7 mm x 0.7 mm (footprint 10.5 m x 10.5 m).

Colour: yellow (or yellow 75%).

402 Open land with scattered trees



Areas with scattered trees or bushes in open land may be generalised by using a regular pattern of large dots in the yellow screen. The dots may be white (scattered trees) or green (scattered bushes/thickets). Prominent individual trees may be added using symbol 417 (*prominent large tree*). If yellow coloured areas become dominant, a screen (75% instead of full yellow) may be used.

May not be combined with other area symbols than symbol 113 (*broken ground*), symbol 208 (*boulder field*) or marsh symbols (308, 310).

Minimum width: 1.5 mm (footprint 22.5 m).

Minimum area: 2 mm x 2 mm (footprint 30 m x 30 m).

Smaller areas must either be left out, exaggerated or shown using the symbol 401 (*open land*).

The symbol is orientated to north.

Colour: yellow (or yellow 75%) with holes of white or green 50%.

403 Rough open land

Heath, moorland, felled areas, newly planted areas (trees lower than ca. 1 m) or other generally open land with rough ground vegetation, heather or tall grass offering the same runnability as typical open forest.

May be combined with symbol 407 (*vegetation, slow running, good visibility*) or 409 (*vegetation, walk, good visibility*) to show reduced runnability.

Minimum area: 1 mm x 1 mm (footprint 15 m x 15 m).

Smaller areas must either be left out, exaggerated or shown using symbol 401 (*open land*).

Colour: yellow 50%.



50%



404 Rough open land with scattered trees

Areas with scattered trees or bushes in rough open land may be generalised by using a regular pattern of large dots in the yellow screen.

The dots may be white (scattered trees) or green (scattered bushes/thickets).


Only the white dot variant can be combined with symbol 407 (*vegetation, slow running, good visibility*) or 409 (*vegetation, walk, good visibility*) to show reduced runnability.

The symbol is orientated to north.

Minimum width: 1.5 mm (footprint 22.5 m). Minimum area: 2.5 x 2.5 mm (footprint 37.5 m x 37.5 m).

Smaller areas must either be left out, exaggerated or shown using symbol 403 (*rough open land*).

Colour: yellow 50% with holes of white, or green 50% (yellow 35%).



∅ 0.5 0.8 (CC) 45° (35%)



405 Forest

Typical open forest for the particular type of terrain. If no part of the forest is easily runnable then no white should appear on the map.

Minimum area: 1 mm x 1 mm (footprint 15 m x 15 m) for openings in screens of other colours, except for 408 (*vegetation, walk*) where the minimum area is 0.7 mm x 0.7 mm (footprint 10.5 m x 10.5 m). For openings in 401 (*open land*), the minimum area is 0.7 mm x 0.7 mm (footprint 10.5 m x 10.5 m). For openings in 410 (*vegetation, fight*) the minimum area is 0.55 mm x 0.55 mm (footprint 8 m x 8 m).

Colour: white.



406 Vegetation, slow running

An area with dense vegetation (low visibility) which reduces running to about 60-80% of normal speed.

Where runnability is better in one direction, a regular pattern of white stripes is left in the screen to show the direction of better running.

Minimum area: 1 mm x 1 mm (footprint 15 m x 15 m).

Minimum width: 0.4 mm (footprint 6 m).

Colour: green 20%.



20%

< 0.4

1.5 (CC)




407 Vegetation, slow running, good visibility

An area of good visibility and reduced runnability due to, for instance, undergrowth (brambles, heather, low bushes, cut branches). Running speed is reduced to about 60-80% of normal speed.

The symbol is orientated to north.

Minimum area: 1.5 mm x 1 mm (footprint 22.5 m x 15 m).

Colour: green (14%).



0.12 0.84 (CC) (14%)



408 Vegetation, walk


An area with dense trees or thickets (low visibility) which reduce running to about 20-60% of normal speed.

Where runnability is better in one direction, a regular pattern of white / green 20% stripes is left in the screen to show the direction of better running.

Minimum area: 0.7 mm x 0.7 mm (footprint 10.5 m x 10.5 m).

Minimum width: 0.3 mm (footprint 4.5 m).

Colour: green 50%.



409 Vegetation, walk, good visibility


An area of good visibility that is difficult to run through due to for instance undergrowth (brambles, heather, low bushes, cut branches). Running speed is reduced to about 20-60% of normal speed.

Areas of good visibility that are very difficult to run or impassable are represented using symbol 410 (*vegetation, fight*) or 411 (*vegetation, impassable*).

The symbol is orientated to north.

Minimum area: 1 mm x 1 mm (footprint 15 m x 15 m).

Colour: green (33%).



410 Vegetation, fight

An area of dense vegetation (trees or undergrowth) which is barely passable.

Running reduced to less than about 20% of normal speed.


For fairness reasons, areas that are really difficult to get through (10% and slower) shall be represented using symbol 411 (*vegetation, impassable*).

Where runnability is better in one direction, a regular pattern of white / green 20% / green 50% stripes is left in the screen to show the direction of better running.

Minimum area: 0.55 mm x 0.55 mm (footprint 8 m x 8 m).

Minimum width: 0.25 mm (footprint 3.8 m).

Colour: green.




411 Vegetation, impassable

An area of dense vegetation (trees or undergrowth) which is effectively impassable. Most useful for narrow and small areas.

Minimum area: 0.8 mm x 0.8 mm (footprint 12 m x 12 m).

Minimum width: 0.35 mm (footprint 5 m).

Colour: green and black 50% or green and black (50%) dot screen: 0.16 mm dots, centre to centre distance 0.2 mm.



412 Cultivated land

Cultivated land, normally used for growing crops. Runnability may vary according to the type of crops grown and the time of year. For agroforestry, symbol 405 (*forest*) or 402 (*open land with scattered trees*) may be used instead of yellow.


Since the runnability may vary, such areas should be avoided when setting courses.


The symbol is combined with symbol 709 (*out of bounds area*) to show cultivated land that shall not be entered.

The symbol is orientated to north.

Minimum area: 3 mm x 3 mm (footprint 45 m x 45 m).

Colour: yellow, black (5%).





413 Orchard

Land planted with trees or bushes, normally in a regular pattern.


The dot lines may be orientated to show the direction of planting.

Must be combined with either symbol 401 (*open land*) or 403 (*rough open land*).

May be combined with symbol 407 (*vegetation, slow running, good visibility*) or 409 (*vegetation, walk, good visibility*) to show reduced runnability.

Minimum area: 2 mm x 2 mm (footprint 30 m x 30 m).

Colour: green (25%), yellow or yellow 50%.




414 Vineyard or similar

A vineyard or similar cultivated land containing dense rows of plants offering good or normal runnability in the direction of planting. The lines shall be orientated to show the direction of planting. Must be combined with either symbol 401 (*open land*) or symbol 403 (*rough open land*).

Minimum area: 2 mm x 2 mm (footprint 30 m x 30 m).

Colour: green (16%), yellow or yellow 50%.




415 Distinct cultivation boundary

A boundary of symbol 412 (*cultivated land*) or a boundary between areas of cultivated land when not shown with other symbols (fence, wall, path, etc.).

Minimum length: 2 mm (footprint 30 m).

Colour: black.



416 Distinct vegetation boundary

A distinct forest edge or vegetation boundary within the forest.

Very distinct forest edges and vegetation boundaries may be represented using the cultivation boundary symbol. Only one of the vegetation boundary symbols (black dotted line or dashed green line) can be used on a map. For areas with a lot of rock features, it is recommended to use the green dashed line for vegetation boundaries.

A disadvantage with a green line is that it cannot be used to show distinct vegetation boundaries around and within symbols 410 (*vegetation, fight*) and 411 (*vegetation, impassable*). An alternative for these situations is to use symbol 415 (*distinct cultivation boundary*).

Minimum length, black dot implementation: 5 dots (2.5 mm – footprint 37 m).

Minimum length, green line implementation: 4 dashes (1.8 mm – footprint 27 m).

Colour: green and black 50% (dashed line) / black (dotted line).



417 Prominent large tree

Footprint: 13.5 m x 13.5 m.

Colour: green.




418 Prominent bush or tree

Use sparingly, as it is easily mistaken for symbol 109 (*small knoll*) by the colour vision impaired.

Footprint: 7.5 m x 7.5 m.

Colour: green.



419 Prominent vegetation feature

The symbol is orientated to north.


Footprint: 13.5 m x 13.5 m.

Colour: green.

3.5 Man-made features

The road and track network provides important information for the competitor and the classification must be clearly recognisable on the map. Of particular importance to the competitor is the classification of smaller paths. Account must be taken not only of the width but also of how obvious the path is to the competitor. Some man-made features constitute obstacles or barriers to the competitor and must be easily identifiable on the map. Important examples are fences, walls, buildings and forbidden areas. Other man-made features are important both for map reading and for control points.


501 Paved area



0.14
50%

An area with a firm level surface such as asphalt, hard gravel, tiles, concrete or the like. Paved areas should be bordered (or framed) by a thin black line where they have a distinct boundary.
Minimum area: 1 mm x 1 mm (footprint 15 m x 15 m).
Colour: brown 50%, black.

502 Wide road



min. 0.3

0.14

50%

The width should be drawn to scale, but not smaller than the minimum width (0.3 + 2*0.14 mm – footprint 8.7 m)
The outer boundary lines may be replaced with other black line symbols, such as symbol 516 (*fence*), 518 (*impassable fence*), 513 (*wall*) or 515 (*impassable wall*) if the feature is so close to the road edge that it cannot practically be shown as a separate symbol.
The space between the black lines is filled with brown (50%).
A road with two carriageways can be represented using two wide road symbols side by side, keeping only one of the road edges in the middle.
Colour: brown 50%, black.


503 Road



0.35

A maintained road suitable for motor vehicles in all weather. Width less than 5 m.
Colour: black.


504 Vehicle track



0.35

A track or poorly maintained road suitable for vehicles only when travelling slowly. For distinct junctions the dashes of the symbols are joined at the junction. For indistinct junctions the dashes of the symbols are not joined.
Minimum length (isolated): two dashes (6.25 mm – footprint 94 m).
Colour: black.


505 Footpath



0.25


An easily runnable path, bicycle track or old vehicle track.
For distinct junctions the dashes of the symbols are joined at the junction. For indistinct junctions the dashes of the symbols are not joined.
Minimum length (isolated): two dashes (4.25 mm – footprint 64 m)
Colour: black.

506 Small footpath




0.18

A runnable small path or (temporary) forest extraction track which can be followed at competition speed.
For distinct junctions the dashes of the symbols are joined at the junction. For indistinct junctions the dashes of the symbols are not joined.
Minimum length (isolated): two dashes (2.25 mm – footprint 34 m).
Colour: black.




507 Less distinct small footpath

A runnable less distinct / visible small path or forestry extraction track.
 Minimum length: two sections of double dashes (5.3 mm – footprint 79.5 m).
 Colour: black.




508 Narrow ride or linear trace through the terrain

A forest ride or a prominent trace (forestry extraction track, sandy track, ski track) through the terrain which does not have a distinct runnable path along it.
 The definition of the symbol must be given on the map.
 Runnability is shown using a slightly thicker line of yellow, green or white as background:
 without outline: the same runnability as the surroundings.
 Yellow 100%: easy running.
 White in green: normal runnability.
 Green 20%: slow running.
 Green 50%: walk.
 Minimum length: two dashes (4.25 mm – footprint 64 m).
 Colour: black + white/green/yellow.




509 Railway

A railway or other kind of railed track.
 If it is forbidden to run along the railway, it shall be combined with symbol 711 (*out-of-bounds route*). If it is forbidden to cross the railway, it must be combined with symbol 520 (*out-of-bounds area*) or 709 (*out-of-bounds area*).
 Minimum length (isolated): two dashes (4 mm – footprint 60 m).
 Colour: black.




510 Power line, cableway or skilift

Power line, cableway or skilift. The bars show the exact location of the pylons. The line may be broken to improve legibility.
 If a section of a power line, cableway or skilift goes along a road or path (and does not offer significant additional navigational value) it should be omitted.
 Minimum length (isolated): 5 mm (footprint: 75 m).
 Colour: black.




511 Major power line

Major power lines should be drawn with a double line. The gap between the lines may indicate the extent of the power line. The lines may be broken to improve legibility.
 Very large carrying masts shall be represented in plan shape using symbol 521 (*building*) or with symbol 524 (*high tower*).
 Colour: black.




512 Bridge / tunnel

Bridges and tunnels are represented using the same basic symbols.
 If it is not possible to get through a tunnel (or under a bridge), it shall be omitted.
 Minimum length (of baseline): 0.4 mm (footprint 6 m).
 Small bridges connected to a track/path are shown by centring a track dash on the crossing. Tracks/paths are broken for water course crossings without bridges. A small footbridge with no path leading to it is represented with a single dash.
 Colour: black.




513 Wall

A significant wall of stone, concrete, wood or other materials. Minimum height: 1 m.
Minimum length (isolated): 2.0 mm (footprint 30 m).
Colour: black.




514 Ruined wall

A ruined or less distinct wall. Minimum height 0.5 m.
Minimum length: two dashes (3.65 mm - footprint 55 m). If shorter, the symbol must be exaggerated to the minimum length or changed to symbol 513 (wall).
Colour: black.




515 Impassable wall

An impassable or uncrossable wall, normally more than 1.5 m high.
Minimum length (isolated): 3 mm (footprint 45 m).
Colour: black.




516 Fence

If the fence forms an enclosed area, tags should be placed inside.
Minimum length (isolated): 1.5 mm (footprint 22.5 m).
Colour: black.




517 Ruined fence

A ruined or less distinct fence. If the fence forms an enclosed area, tags should be placed inside.
Minimum length: two dashes (3.65 mm – footprint 55 m). If shorter, the symbol must be exaggerated to the minimum length or changed to symbol 516 (fence).
Colour: black.




518 Impassable fence

An impassable or uncrossable fence, normally more than 1.5 m high.
If the fence forms an enclosed area, tags should be placed inside.
Minimum length (isolated): 2 mm (footprint 30 m).
Colour: black.



519 Crossing point

A way through or over a wall, fence or other linear feature, including a gate or stile.
For impassable features, the line shall be broken at the crossing point. For passable features, the line shall not be broken if passing involves a degree of climb.
Colour: black.



520 Area that shall not be entered

An out-of-bounds area is a feature such as a private house, a garden, a factory or another industrial area. Only contours and prominent features such as railways and large buildings shall be shown inside an out-of-bounds area. Vertical black stripes may be used for areas where it is important to show a complete representation of the terrain (e.g. when a part of the forest is out-of-bounds).
The area shall be discontinued where a path or track goes through.
Out-of-bounds areas should be bounded by the black boundary line or another black line symbol (e.g. fence). Overprint symbol 709 can be used for temporary out-of-bounds areas. The vertical black stripes version of the symbol is orientated to north.
An out-of-bounds area shall not be entered.
Minimum area: 1 mm x 1 mm (footprint 15 m x 15 m).
Colour: yellow + green 50%, or black (33%).

521 Building

A building is shown with its ground plan so far as the scale permits.

Buildings larger than 75 m x 75 m may be represented with a dark grey infill in urban areas.


Passages through buildings must have a minimum width of 0.3 mm (footprint 4.5 m).

Buildings within forbidden areas are generalised.

Areas totally contained within a building shall not be mapped (they shall be represented as being part of the building). Minimum gap indicating a passage between buildings and between buildings and other impassable features should be 0.25 mm.

Minimum area: 0.5 mm x 0.5 mm (footprint 7.5 m x 7.5 m).

Colour: black (or black 65%, black).




522 Canopy

An accessible and runnable area with roof.

Minimum area (isolated): 0.6 mm x 0.6 mm (footprint 9 m x 9 m). Minimum (inside) width: 0.3 mm (footprint 4.5 m).

Colour: black 20%, black.




523 Ruin

A ruined building. The ground plan of a ruin is shown to scale, down to the minimum size. Ruins that are so small that they cannot be drawn to scale may be represented using a solid line.

Minimum area (outside measures): 0.8 mm x 0.8 mm (footprint 12 m x 12 m).

Colour: black.




524 High tower

A high tower or large pylon. If it is in a forest, it must be visible above the level of the surrounding forest.

The symbol is orientated to north.

Footprint: 21 m x 21 m. Towers with a larger footprint must be represented using symbol 521 (*building*).

Colour: black.



525 Small tower


An obvious small tower, platform or seat.

Location is at the centre of gravity of the symbol.

The symbol is orientated to north.

Footprint: 15 m x 15 m.

Colour: black.



526 Cairn

A prominent cairn, memorial stone, boundary stone or trigonometric point.

Minimum height: 0.5 m.

Footprint: 12 m x 12 m.

Colour: black.



527 Fodder rack


A fodder rack, which is free standing or attached to a tree.


Location is at the centre of gravity of the symbol.

The symbol is orientated to north.

Footprint: 13.5 m x 13.5 m.

Colour: black.






528 Prominent line feature

A prominent man-made line feature. For example, a low pipeline (gas, water, oil, heat, etc.) or a bobsleigh/skeleton track that is clearly visible. The definition of the symbol must be given on the map.

Minimum length: 1.5 mm (footprint 22.5 m).

Colour: black.



529 Prominent impassable line feature

An impassable man-made line feature. For example, a high pipeline (gas, water, oil, heat, etc.) or a bobsleigh/skeleton track. The definition of the symbol must be given on the map.

Minimum length: 2 mm (footprint 30 m).

Colour: black.




530 Prominent man-made feature – ring

Location is at the centre of gravity of the symbol.

Footprint: 12 m x 12 m.

Colour: black.



531 Prominent man-made feature – x

Location is at the centre of gravity of the symbol, and the symbol is orientated to north.

Footprint: 12 m x 12 m.

Colour: black.

3.6 Technical symbols



601 Magnetic north line

Magnetic north lines are lines placed on the map pointing to magnetic north, parallel to the sides of the paper. Their spacing on the map shall be 20 mm on the map which represents 300 m on the ground at the scale of 1:15 000. If the map is enlarged to 1:10 000, the spacing of the lines will be 30 mm on the map.

North lines shall be broken to improve the legibility of the map, for instance where they would obscure small features. In areas with very few water features, blue lines may be used.


Colour: black or blue.



602 Registration mark

At least three registration marks should be placed within the frame of a map in a non-symmetrical position. These can be used for course overprinting when overprinting on already printed maps. In addition, it allows a check of colour registration when printing colours separately.

Colour: all printing colours.



603 Spot height

Spot heights are used for the rough assessment of height differences. The height is given to the nearest metre. Water levels are given without the dot. Spot heights must only be used where they do not conflict with other symbols.

Font: sans-serif, 1.5 mm, non-bold, non-italic.

Colour: black.

3.7 Overprinting symbols


Note: dimensions are specified in mm at the printed scale of 1:15 000. **Drawings in this section are at 1:15 000 also.**

The sizes of the overprinting symbols are given for the map scale 1:15 000. For larger map scales the symbols shall be enlarged proportionally (to 150% for 1:10 000, to 300% for 1:5 000). All overprint symbols shall be printed over the map content (transparently). They shall never mask out other map details.

701 Start

The place where the orienteering starts. The centre of the triangle shows the precise position where the orienteering course starts. The start must be on a clearly identifiable point on the map. The triangle points in the direction of the first control.

Colour: purple.



702 Map issue point

If there is a marked route to the start point, the map issue point is marked using this symbol.

Colour: purple.



703 Control point

For point features, the centre of the circle shall be the centre of the symbol. For line and area features, the centre of the circle shows the precise position of the control marker. Controls shall only be placed on points that are clearly identifiable on the map.

Sections of the circle should be omitted to leave important detail showing. Colour: purple.

704 Control number

The number of the control is placed close to the control point circle in such a way that it does not obscure important detail. The numbers are orientated to north.

Font: sans-serif, 4.0 mm, non-bold, non-italic.

Colour: purple.



705 Course line

Where controls are to be visited in order, the sequence is shown using straight lines from the start to the first control and then from each control to the next one. Sections of lines should be omitted to leave important detail showing. The line should be drawn via mandatory crossing points. There should be gaps between the line and the control circle in order to increase the readability of the underlying detail close to the control.


Colour: purple.



706 Finish

The end of the course.

Colour: purple.




707 Marked route

A marked route that is a part of the course. It is mandatory to follow the marked route. Minimum length: 2 dashes (4.5 mm – footprint: 67.5 m).


Colour: purple.





708 Out-of-bounds boundary

A boundary which it is not permitted to cross.
 An out-of-bounds boundary shall not be crossed.
 Minimum length: 1 mm (footprint: 15 m).
 Colour: purple.




709 Out-of-bounds area

An out-of-bounds area. A bounding line may be drawn if there is no natural boundary, as follows:


- a solid line indicates that the boundary is marked continuously (tapes, etc.) in the terrain,
- a dashed line indicates intermittent marking in the terrain,
- no line indicates no marking in the terrain.

An out-of-bounds area shall not be entered.
 Minimum area: 2 mm x 2 mm (footprint 30 m x 30 m).
 Colour: purple (29%).



710 Crossing point

A crossing point, for instance through or over a wall or fence, across a road or railway, through a tunnel or out-of-bounds area, or over an uncrossable boundary is drawn on the map with two lines curving outwards. The lines shall reflect the length of the crossing.
 Colour: purple.




711 Out-of-bounds route

A route which is out-of-bounds. Competitors are allowed to cross directly over a forbidden route, but it is forbidden to go along it.
 An out-of-bounds route shall not be used.
 Minimum length: 2 symbols (6 mm – footprint 90 m).
 Colour: purple.



712 First aid post

The location of a first aid post.
 Colour: purple.




713 Refreshment point

The location of a refreshment point which is not at a control.
 Colour: purple.

3.8 Precise definition of symbols

Note: dimensions are specified in mm.

All drawings are magnified (10x) for clarity. The centre of gravity is marked (x) when it is not unambiguous.

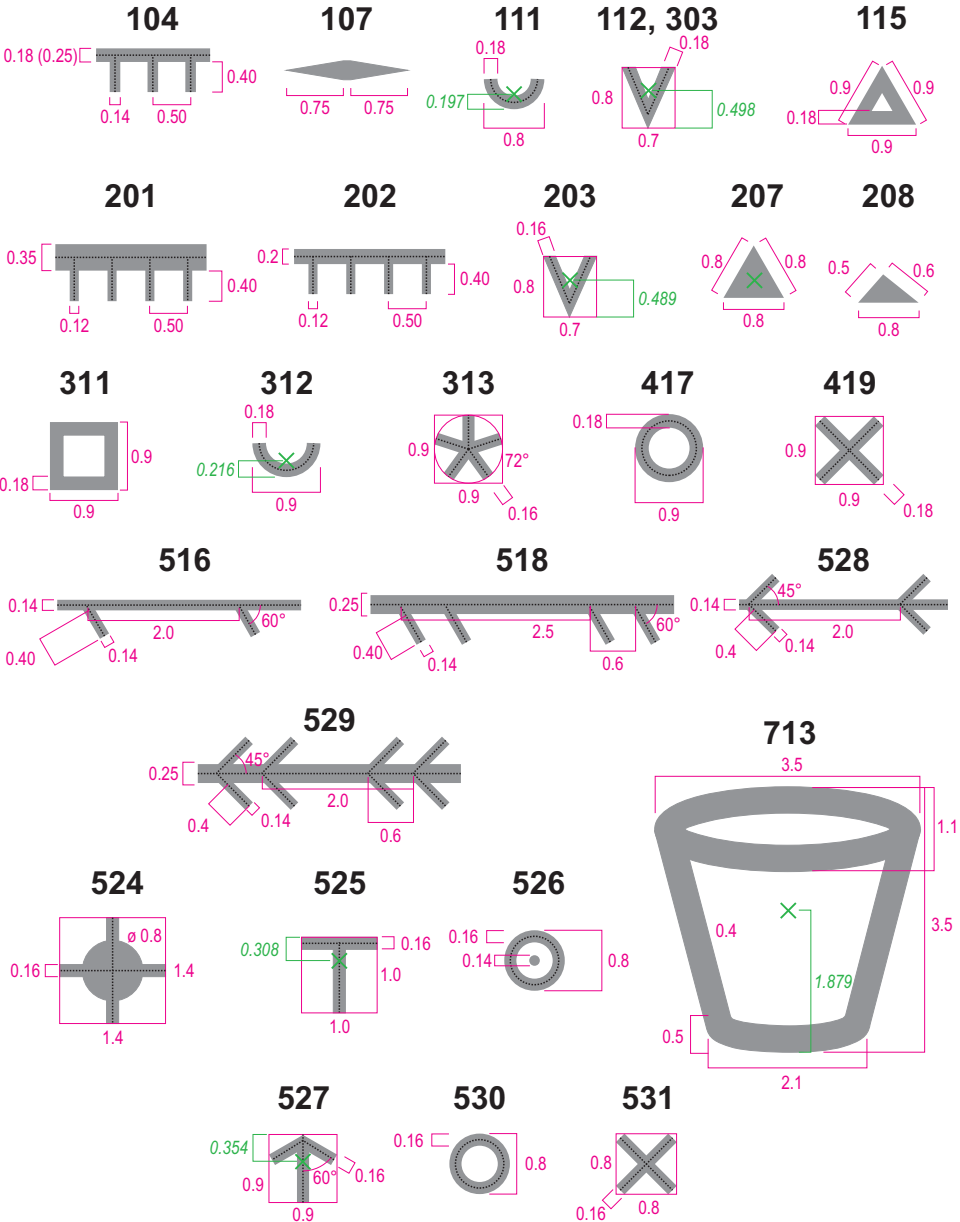



SPORTident
Make the most of your sport!



SPORTident timing solution - feel the difference

- ▲ SPORTident offers a comprehensive system solution for the orienteering sport.
- ▲ Our solution provides timing, identification and immediate results.
- ▲ There are two configurations available: The SPORTident classic system by punching the stations and the contactless timing system SPORTident AIR+ by passing the stations.
- ▲ Our equipment is light, robust and easy to set up.
- ▲ Prepare yourself best for the upcoming orienteering events with our solution and experience unforgettable sport competitions.

For more information please visit our website: www.sportident.com



Made in Germany

